



# Industrial Peristaltic Pumps

## DS-M Data sheet




### Types of tubes available

Silicone  
Norprene® A-60-F  
Tygon®  
Norprene® A-60-G  
Solva®

### Internal tube diameters available

Ø	ml/rev.
1,6 mm	0,40
3,2 mm	1,66
4,8 mm	3,80
6,4 mm	6,26
8,0 mm	10,10

### Performance table

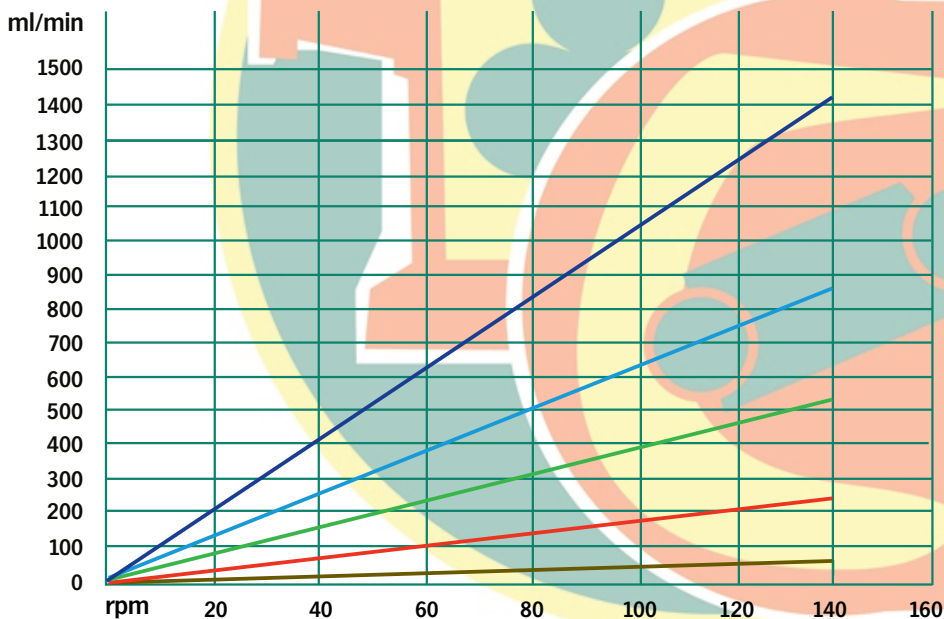

Ø 8,0 mm tube

Ø 6,4 mm tube


Ø 4,8 mm tube

Ø 3,2 mm tube

Ø 1,6 mm tube



Description	Material	Surface treatment
Pump housing	HDPE	--
Front cover	Methacrylate	--
Rotor	Stainless Steel AISI-304	--
Rollers	Polyamide PA6	--
Base plate	Steel F-111 Stainless Steel AISI-304 (Optional)	Polyester powder coated --

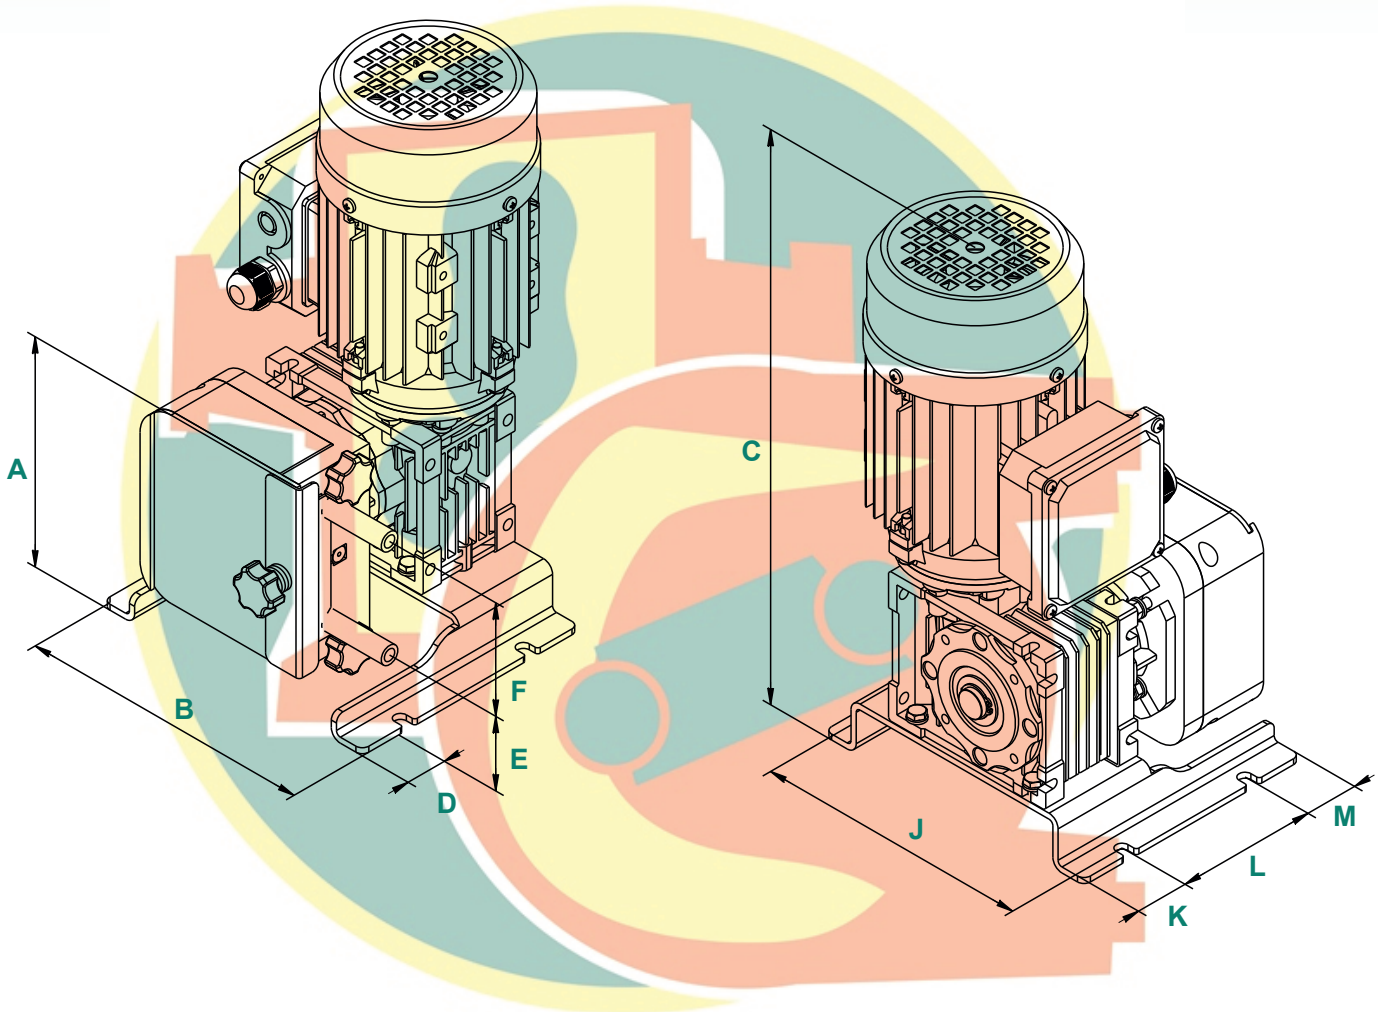

A	B	C	D	E	F	J	K	L	M	Connections
148	200	*	31	47	76	187	36	95	36	-

\* To confirm according type and power driver.



**Bombas Boyser, S.L.**  
 c/ Miquel Martí i Pol, s/n - Pol. Ind. Pla de la Costa  
 08182 Sant Feliu de Codines - Barcelona - Spain  
 Tel. +34 93 844 77 78 info@boyser.com

[www.boyser.com](http://www.boyser.com)

