

# Midgetbox



## Specifications and types



Zone 2 – Zone 22	II 3G Ex h IIB T4 Gc e II 3D Ex h IIIB T135°C Dc X
Zone 1 – Zone 21	II 2G Ex h IIB T4 Gb e II 2D Ex h IIIB T135°C Db X
Zone 1 – Zone 21	II 2G Ex h IIC T4 Gb **

\*\* The Group IIC gas application string is applicable on Boxer series pumps in Conduct version with TFM Conductive diaphragms.

Suction / delivery connections	1/4" f BSPP (*)
Air fitting	1/8" f BSPP
Max. flow rate*	6 l/min
Max. supply air pressure	8 bar
Max. head*	80 m
Max negative suction head - dry-running**	3 m
Max negative suction head - with pump primed	9,5 m
Max. diameter suspended solids	0 mm
Noise	60 dB

(\*) NPT fittings on request

\* The curves and the performances refer to pumps with immersed suction and open delivery outlet, with water at 20°C and vary depending on material composition.

\*\* The value depends on the pump configuration.



### PLASTIC MATERIAL - PP (GF/CF)

### Midgetbox



#### Maximum dimensions




Altezza	75 mm
Larghezza	122 mm
Profondità	60 mm



#### Construction mat. (casing and manifolds) and net weight

<b>POLYPROPYLENE (with glass additive)</b>	0,52 Kg
	Temp. 3°C min.
	65°C max

<b>CONDUCTIVE POLYPROPYLENE (with carbon additive)</b>	0,52 Kg
	Temp. 3°C min.
	65°C max

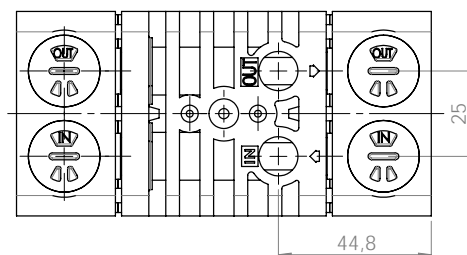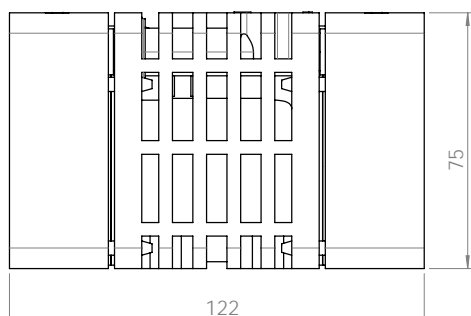

# Midgetbox




## Specifications and types



Zone 2 – Zone 22  
Zone 1 – Zone 21  
Zone 1 – Zone 21

II 3G Ex h IIB T4 Gc e II 3D Ex h IIIB T135°C Dc X  
II 2G Ex h IIB T4 Gb e II 2D Ex h IIIB T135°C Db X  
II 2G Ex h IIC T4 Gb \*\*

\*\* The Group IIC gas application string is applicable on Boxer series pumps in Conduct version with TFM Conductive diaphragms.

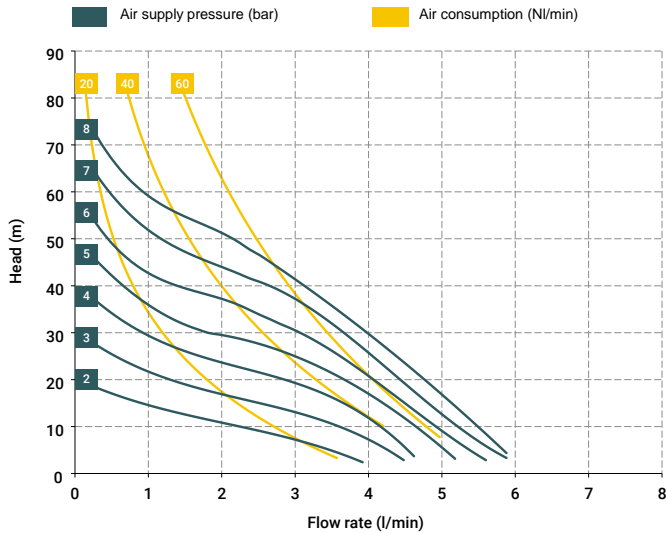

Any colour variations in our plastic products are due to the special mixtures of the raw materials used. The use of high fillers, glass and long-fibre carbon, provides a distinctive aesthetic that in no way detracts from the quality of the product, but rather emphasises its high technical content, to the benefit of performance.

### Distributor material T10 (pneumatic circuit)

- POM

### Central material

- Polypropylene (with glass additive)
- Conductive polypropylene (with carbon additive)

### Valves materials

- PPS
- PEEK

### Diaphragm materials

- PTFE
- NBR

### Caps materials

- Polypropylene (with glass additive)
- Conductive polypropylene (with carbon additive)

### Balls materials

- AISI 316 L
- PYREX

### O-ring materials

- PTFE

### Packaging

cardboard box - cm 14 x 19 x 14 – weight 0.17 Kg  
(the weight refers only to the packaging without the pump inside)

### Accessories

- Equaflux 51 (For the dampener materials refer to the relative technical sheet)
- Air regulation kit W1000-8-G



Self-Priming Use



Under Head Use



Drum Transfer



Immersed