




## Fragrance Manufacturer - Case Study

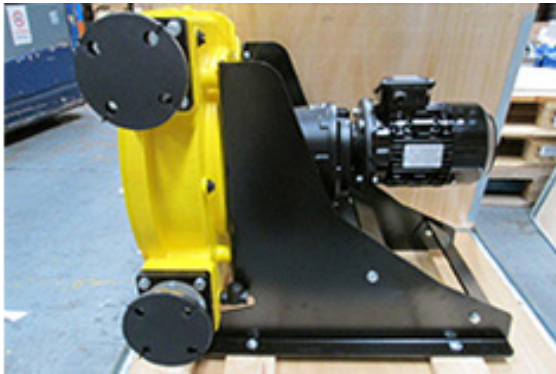

### Case Study Information

Customer	Scented Candle / Home Fragrance Manufacturer
Location	United Kingdom

### Equipment Supplied:

#### 1 x Horizontal Boyser Close Coupled Industrial Peristaltic Pump with Gear Box

Type	FMP-50
Application	Wax Transfer Pump
Fluid	Rapeseed Wax
Temperature	60°C
Viscosity	20 cP
Flow	3000 l/h
Total Head	15m
Design Pressure	8 bar
Hose	NBR (Nitrile)
Connections	Stainless Steel AISI-316
Pump Casing	Cast Iron + Polyester Powder Coating
Gear Box/Reducer	1.1 kW, 230/400v, 3 Phase, 50 Hz, 34 rpm, Protection Grade IP-55
Suction/Discharge Flange Size	DN-40

### Enquiry:

- ✓ Our customer, one of the largest UK home fragrance manufacturers contacted us with an enquiry for transferring wax at 60°C. They were looking for a pump that could do a batch of 400 kg in 10 minutes; the pump would be running intermittently with a maximum of 3 the batches per hour.

### Solution:

- ✓ From experience we knew that due to the viscous fluid being pumped and low flow rate required by the customer the best solution for the enquiry was a peristaltic pump, peristaltic pumps are very effective in batch transfer applications where a fixed flow rate is needed repeatedly. We supplied the customer with an industrial peristaltic pump with a 1.1 kW gear box, running at 34 rpm and a designed pressure of 8 Bar.
- ✓ Easy maintenance is one of the main benefits of these pumps, as the only real wear part on the pump is the hose, a relatively low cost part that can be sterilised or changed quite easy and in a very short time without having to dismantle the pump, the hose is also the only part of the pump that is in contact with the fluid.